




MIN ADJUSTMENT

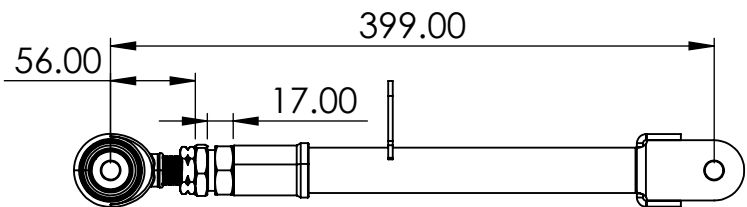

OEM ADJUSTMENT

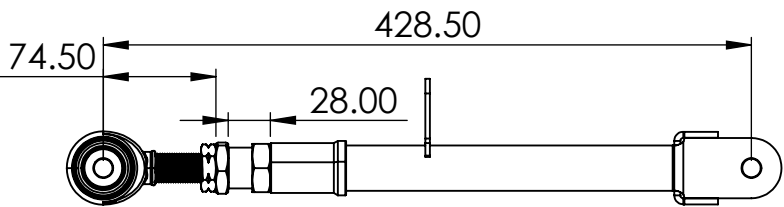

MAX ADJUSTMENT

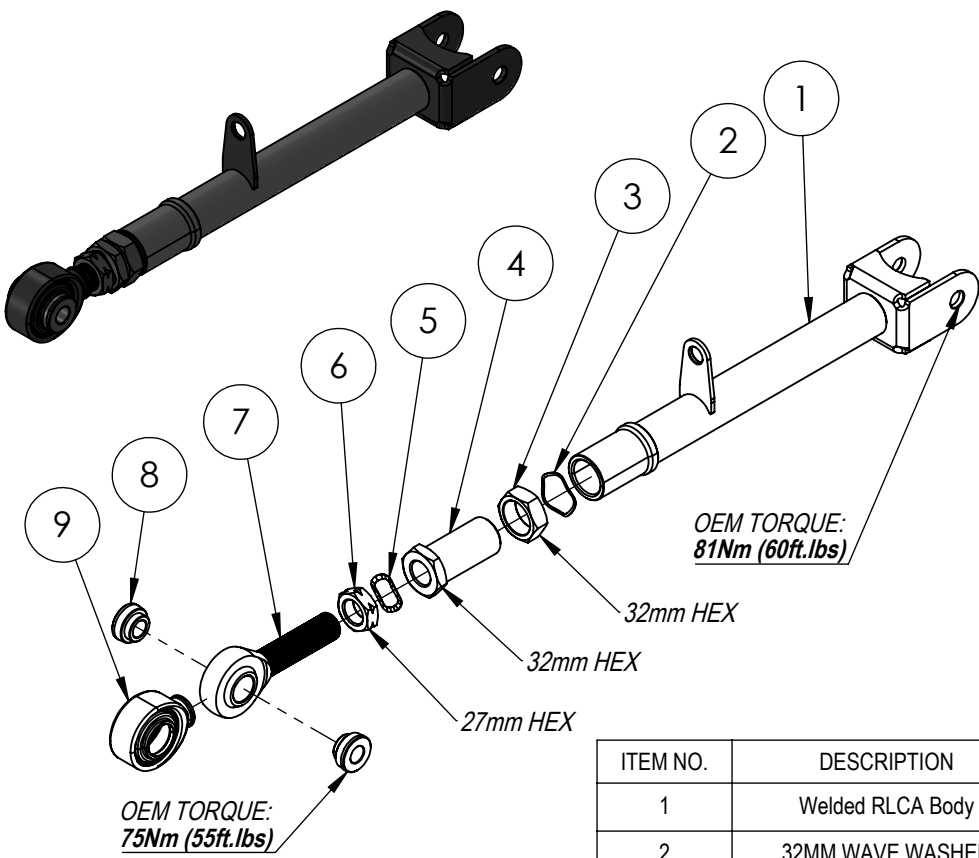

CRITICAL!

CHECK FOR ROD END BEARING ALIGNMENT
AFTER TIGHTENING THE ADJUSTING MECHANISM
ROD END TO BE PERPENDICULAR TO THE SPACERS

ITEM NO.	DESCRIPTION	QTY.
1	Welded RLCA Body	2
2	32MM WAVE WASHER	2
3	M27 JAM NUT	2
4	VERNIER SLEEVE	2
5	27MM WAVE WASHER	2
6	NUT 3/4-16 NUT, LH	2
7	PCML12TES BEARING	2
8	39.00MM WIDTH SPACER	4
9	DUST BOOT	2